



BALTIC INTERNATIONAL ACADEMY

International scientific conference

MODERN CHALLENGES AS AN IMPETUS FOR TECHNICAL INNOVATIONS

October 3–4, 2024



IZDEVNIECĪBA
BALTIJA
PUBLISHING

2024

ORGANISING COMMITTEE:

Stanislav Buka – dr.oec., prof., Rector of the Baltic International Academy;

Iryna Plotka – dr.psych., prof., Baltic International Academy;

Tatiana Yurkevich – dr.iur., as.prof., Baltic International Academy;

Alla Iljina – dr.oec., docent, Baltic International Academy;

Zhanna Tsaurkubule – dr.sc.ing., professor, Baltic International Academy.

Each author is responsible for content and formation of his/her materials.

The reference is mandatory in case of republishing or citation.

Modern challenges as an impetus for technical innovations (October 3–4, 2024. Riga, the Republic of Latvia) : International scientific conference. Riga, Latvia : Baltija Publishing, 2024. 88 pages.

Methods of researching engineering problems Syvash S. B., Sokolovska H. V., Sokolovskyi S. Yu.	46
--	----

SECTION 6. ELECTRIC POWER ENGINEERING, ELECTRIC ENGINEERING AND ELECTROMECHANICS

Structural-functional model of a proactive control system for a ship synchronous generator Ushkarenko O. O.	51
--	----

SECTION 7. POWER ENGINEERING

Use of a valve spool device for controlling valves of the gas exchange system of motor vehicles Avdiunin R. Yu., Prudnikov I. A., Hurn K. Yu.	566
--	-----

SECTION 8. HEAT POWER ENGINEERING

Technical limitations of power-to-heat technology implementation in district heating systems of Ukraine Derii V. O., Zgurovets O. V., Havrylenko Ya. V.	61
--	----

SECTION 9. AUTOMATION AND TOOL ENGINEERING

Development and improvement of the system for automatic mixing of sintering mixture in mixing drums Pukhalska O. M., Chekryhin R. O., Chesnova H. O.	655
---	-----

SECTION 10. FOOD TECHNOLOGIES

Non-traditional composite flour mixtures in fresh dough technology Danyliuk I. P., Strutynska L. T.	70
---	----

SECTION 11. ARCHITECTURE AND CONSTRUCTION

General principles of formation and signs of development of territorial recreation systems Zyhun A. Yu., Pleshynets A. V.	74
--	----

SECTION 12. TRANSPORT

Development of proposals for the creation of a military vehicle design with the accumulation of rotational energy of the wheel propulsion Petrov L. M., Kishianus I. V., Borysenko T. M.	788
---	-----

SECTION 13. GENERAL ISSUES OF ENGINEERING SCIENCES

On stability at the first approach solution of one problem for the system of telegraph equations Dejneka O. Yu.	82
--	----

SECTION 6. ELECTRIC POWER ENGINEERING, ELECTRIC ENGINEERING AND ELECTROMECHANICS

DOI <https://doi.org/10.30525/978-9934-26-475-7-12>

STRUCTURAL-FUNCTIONAL MODEL OF A PROACTIVE CONTROL SYSTEM FOR A SHIP SYNCHRONOUS GENERATOR

СТРУКТУРНО-ФУНКЦІОНАЛЬНА МОДЕЛЬ СИСТЕМИ УПЕРЕДЖУЮЧОГО КЕРУВАННЯ СУДНОВИМ СИНХРОННИМ ГЕНЕРАТОРОМ

Ushkarenko O. O.

*Doctor of Engineering Sciences,
Professor,
Professor at the Department
of Programmable Electronics,
Electrotechnics
and Telecommunications,
Admiral Makarov National University
of Shipbuilding
Mykolaiv, Ukraine*

Ушкаренко О. О.

*доктор технічних наук, професор,
професор кафедри програмованої
електроніки,
електротехніки і телекомунікацій
Національний університет
кораблебудування
імені адмірала Макарова
м. Миколаїв, Україна*

Direct starting of induction motors in ship electric power systems can have several negative consequences for both the motors [1, p. 1674; 2, p. 63] and other consumers. This direct starting process notably causes significant voltage dips in the ship's network [3, p. 262]. If the magnitude and duration of these voltage dips exceed the thresholds set by protection systems, it can trigger these systems and lead to the power plant [4, p. 968] shutting down, as the situation might be mistakenly identified as a short circuit.

A detailed analysis of the direct starting process of induction motors, based on simulations, was conducted in [5, p. 144]. However, the results from [5, p. 147] focus on the starting of unloaded induction motors and do not address the impact on the electric power source. In ship electric power systems with limited generated power, direct starting of the motor causes substantial voltage dips, adversely affecting other consumers connected to the network. On ships and drilling platforms, induction motors are often used in pumps, and their power frequently matches that of the generators. To reduce voltage dips during the direct starting of induction motors, special soft starter systems are employed.

the input port $f_2(^1\text{Port})$ of the functional structure $f_1(\text{Core}^{\text{MC}})$ of the microcontroller core, which corresponds to the required period $\langle T^{\omega} \rangle$ of the drive rotor revolutions $f_1(\text{Drive}^{\text{Power}^{\pm\Delta\omega}}_{\omega})$, and to the input port $f_1(^1\text{Port})$ of the functional structure $f_1(\text{Core}^{\text{MC}})$ of the microcontroller core is represented by an information pulse sequence of voltage $[U_{\text{out}}^{\pm T^{(1)}_{\omega}}]$, which corresponds to the current value $\langle T(t) \rangle$ of the rotation period of the drive rotor $f_1(\text{Drive}^{\text{Power}^{\pm\Delta\omega}}_{\omega})$.

The axis of the functional structure of the rotor is fixed with the axis of the laser disk $f_2(\text{Laser Disk}^{\omega}_{\text{Inform}})^T$ with semiconductor structures of the optical radiation source $f_2(\text{n-p}^{\uparrow}_{\text{hv}})$ and the optical radiation receiver $f_2(\text{hv-n-p})$ to activate information arguments $[U_{\text{out}}^{T^{(1)}_{\omega}}]$, which using the functional structure $f_1(\text{Core}^{\text{MC}})$ of the microcontroller core in accordance with the mathematical model in Fig. 3 are supplied to the input port $f_3(^1\text{Port})$ to adjust the voltage control arguments $^{\pm\varphi 1-3}U_{\text{ctrl}}\uparrow$.

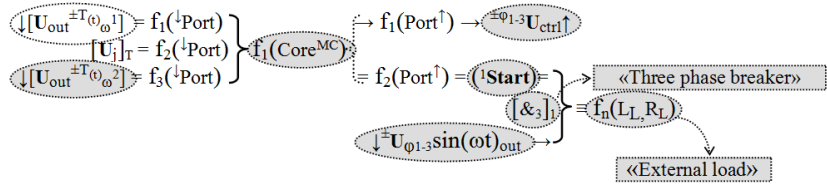


Fig. 3

In this case, the functional connections of the drive $f_1(\text{Drive}^{\text{Power}^{\pm\Delta\omega}}_{\omega})$, asynchronous drive $f_2(\text{Drive}^{\text{Power}^{\pm\Delta\omega}}_{\omega})$ and the functional structure of the generator $f_1(\text{Gener}^U)$ are performed in accordance with the mathematical model presented in Fig. 4.

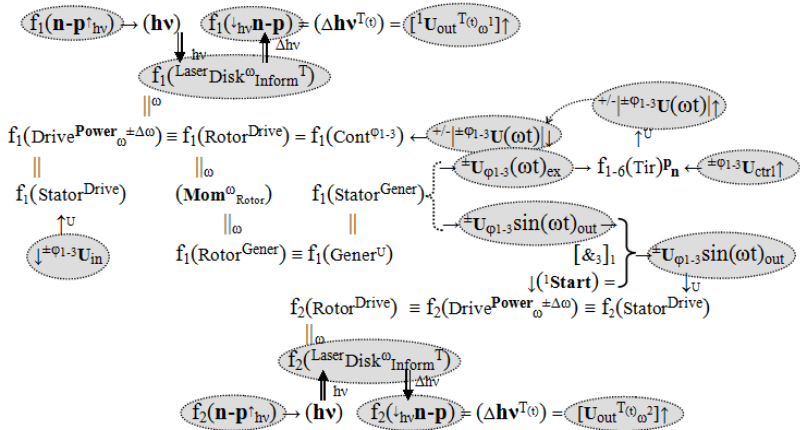


Fig. 4

It should be noted that the system also uses the functional structure of the disk of rotation $f_1(\text{Disk}^\omega)$ with information about the rotation period $\langle T^\omega \rangle$ of the drive rotor $f_1(\text{Drive}^{\text{Power } \pm \Delta\omega})$ and semiconductor structures of the optical radiation source $f_1(n\text{-}p^{\uparrow}_{\text{hv}})$ and the optical radiation receiver $f_1(p^{\downarrow}_{\text{hv}}n\text{-}p)$. In this case, the rotation disk $f_1(\text{Disk}^\omega)$ of the drive $f_1(\text{Drive}^{\text{Power } \pm \Delta\omega})$ is made in the form of a functional structure of a laser disk $f_1(\text{Laser Disk}^{\text{Inform } T})$ with written optical information $\langle \text{Inform} \rangle$ about the rotation period $\langle T^\omega \rangle$, and is fixed on the functional structure of the rotor $f_1(\text{Rotor}^{\text{Drive}})$ of drive $f_1(\text{Drive}^{\text{Power } \pm \Delta\omega})$. In this model, the input arguments are formed in accordance with the analytical expression in Fig. 5.

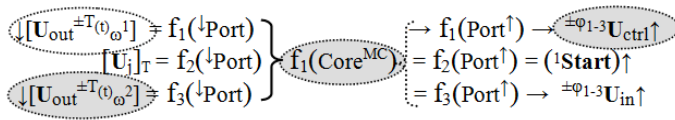


Fig. 5

As was shown, in addition to the examined methods for reducing voltage dips caused by induction motors start and localizing their sources, other control techniques can be utilized. Using the proposed method of proactive changing the excitation voltage $\pm U_{\varphi 1-3}(\omega t)_{\text{ex}}$ and output energy argument of voltage $\pm U_{\varphi 1-3} \sin(\omega t)_{\text{out}}$ of a ship synchronous generator $f_1(\text{Gener}^U)$ when connecting an asynchronous drive $f_2(\text{Drive}^{\text{Power } \pm \Delta\omega})$ to it potentially reduces voltage dips.

Bibliography:

1. Joaquín Pedra, Luis Sainz, Felipe Corcoles. Effects of symmetrical voltage sags on squirrel-cage induction motors. *Electric Power Systems Research*. 2017. Vol. 77, No. 12. P. 1672–1680.
2. Jerzy Krygier, Tomasz Zarębski. Selected problems of starting of submersible induction motors. *Przegląd Elektrotechniczny*. 2004. No. 1. P. 62–65.
3. S. Hardi, [et al.]. Effects of Different Voltage Sag Types on Induction Motor. *Applied Mechanics and Materials*. 2015. No. 793. P. 262–266.
4. Al-Suod Mahmoud M., A. Ushkarenko, O. Dorogan. Monitoring and Automatic Control for Ship Power Plants Based Logical Algorithms. *International Journal of Advanced Computer Research (IJACR)*. 2014. Vol. 4, No. 17. P. 966–972.
5. Asadollah Kazemi, Azah Mohamed, Hussain Shareef, Hadi Zayandehroodi. Review of Voltage Sag Source Identification Methods for Power Quality Diagnosis. *Przegląd Elektrotechniczny*. 2013. No. 8. P. 143–149.

6. Abdullah Eial Awwad, Mahmoud Al-Soud, O. Ushkarenko, Alaa Al-Quteimat. Simulation-Based Analysis of Dynamics of Autonomous Electric Power Systems. *Mathematical Modelling of Engineering Problems*. 2022. Vol. 9, No. 4. P. 887–896.

The project was implemented with the support of



The Center for Ukrainian-European Scientific Cooperation is a non-governmental organization, which was established in 2010 with a view to ensuring the development of international science and education in Ukraine by organizing different scientific events for Ukrainian academic community.

The priority guidelines of the Center for Ukrainian-European Scientific Cooperation

1. International scientific events in the EU

Assistance to Ukrainian scientists in participating in international scientific events that take place within the territory of the EU countries, in particular, participation in academic conferences and internships, elaboration of collective monographs.

2. Scientific analytical research

Implementation of scientific analytical research aimed at studying best practices of higher education establishments, research institutions, and subjects of public administration in the sphere of education and science of the EU countries towards the organization of educational process and scientific activities, as well as the state certification of academic staff.

3. International institutions study visits

The organisation of institutional visits for domestic students, postgraduates, young lecturers and scientists to international and European institutes, government authorities of the European Union countries.

4. International scientific events in Ukraine with the involvement of EU speakers

The organisation of academic conferences, trainings, workshops, and round tables in picturesque Ukrainian cities for domestic scholars with the involvement of leading scholars, coaches, government leaders of domestic and neighbouring EU countries as main speakers.

Contacts:

Head Office of the Center for Ukrainian-European Scientific Cooperation:
88000, Uzhhorod, 25, Mytraka str.
+38 (099) 733 42 54
info@cuesc.org.ua

Modern challenges as an impetus for technical innovations

October 3–4, 2024

Izdevniecība “Baltija Publishing”
Valdeķu iela 62 – 156, Rīga, LV-1058
E-mail: office@baltijapublishing.lv

Iespiests tipogrāfijā SIA “Izdevniecība “Baltija Publishing”
Parakstīts iespiešanai: 2024. 7. oktobris
Tirāža 100 eks.